

# CLASSMATES QUILT



35 1/2" x 54 1/2"



06/01/2024

# CLASSMATES QUILT

## FINISHED QUILT SIZE 35 1/2" x 54 1/2"

Please read all instructions before beginning this project.  
Yardage calculated using a 42" usable width of fabric.

## GENERAL INSTRUCTIONS

Please check [www.rileyblakedesigns.com/pattern-updates](http://www.rileyblakedesigns.com/pattern-updates) for any revisions before starting this project. This pattern requires a basic knowledge of quilting techniques and terminology. The quilt diagrams portrayed are virtual images. The layout and look of your project may differ when using actual fabric.

Please note that prewashing can shrink 100% cotton fabric. Always verify after washing and drying that there is still 42" of usable width available. Shrinkage can affect the size of panel motifs and fussy cutting sizes may need to be adjusted. If this is the case, add strips around the edge of the fussy cut piece to create a pieced unit that matches the size of the fussy cut dimensions given in the cutting instructions.

Measurements include 1/4" seam allowance. Sew with right sides together unless stated otherwise. Refer to the quilt layout diagram for placement of the prints. Press seams as noted in each step for best results. Dimensions listed in steps are unfinished sizes unless stated otherwise.

WOF = Width of Fabric  
RST = Right Sides Together  
LOF = Length of Fabric

## FABRIC REQUIREMENTS

All fabrics are from the Old School fabric collection.

- (1) PD14950-PANEL Classroom Main Panel
- 3/4 Yard CD14953-BLACK Classmates Border Stripe
- 5/8 Yard C14964-CHARCOAL Penmanship
- 1/2 Yard C14961-WHITE Library Card (binding)

## OTHER SUPPLIES

Basic Sewing Supplies  
1 1/4 Yards Wide Back backing fabric of your choice  
Batting

## CUTTING INSTRUCTIONS

Please read all pattern instructions before cutting fabrics. Use a straight edge ruler and rotary cutter to cut your fabrics and label all cuts as noted.



### Classroom Main Panel

Cut (1) 24" x 43" panel, centered over the motif as shown.



### Black Classmates Border Stripe

Fussy cut (6) 3 1/4" x LOF\* strips, centered on the motifs; sew the strips together end-to-end and subcut:

- (2) 3 1/4" x 43" strips. Label A for inner side borders.
- (2) 3 1/4" x 29 1/2" strips. Label B for inner top/bottom borders.

\*Please note these strips are cut LOF, not WOF.



### Charcoal Penmanship

Fussy cut (5) 3 1/4" x WOF strips; sew the strips together end-to-end and subcut:

- (2) 3 1/2" x 48 1/2" strips. Label C for outer side borders.
- (2) 3 1/2" x 35 1/2" strips. Label D for outer top/bottom borders.

|                    |              |             |                |               |               |                    |              |
|--------------------|--------------|-------------|----------------|---------------|---------------|--------------------|--------------|
| SEP. 6 '55         | Nov. 29 1955 | Mar. 3 1955 | July 19, 1949  | OCT. 31, 1949 | JAN. 1, 1950  | SEP. 6 '55         | Nov. 29 1955 |
| OLD SCHOOL LIBRARY |              |             | Sept. 1, 1949  | Oct. 31, 1949 | JAN. 18, 1950 | OLD SCHOOL LIBRARY |              |
| DATE DUE           |              |             | Sept. 12, 1949 | Nov. 9, 1949  | Jan. 19, 1950 | DATE DUE           |              |
| MAY 9 1954         | AUG. 4 1954  | DEC. 3 1954 |                |               | JAN. 27 1955  | MAY 9 1954         | AUG. 4 1954  |

### White Library Card

Cut (5) 2 1/2" x WOF strips. Set aside for binding.



# CLASSMATES QUILT

## QUILT ASSEMBLY

1. Sew the A-borders to the sides of the panel and press, then sew the B-borders to the top and bottom and press. Reference the quilt layout diagram for the proper placement and orientation. The quilt center with inner borders should measure 29 ½" × 48 ½".
2. Sew the C-borders to the sides and press, then sew the D-borders to the top and bottom and press. The quilt top is now complete and should measure 35 ½" × 54 ½".


## FINISHING INSTRUCTIONS

3. Layer your backing, batting, and quilt top. Baste and quilt as desired.
4. Sew the White Library Card binding strips together end-to-end. Bind the trimmed, finished quilt using your favorite binding method.

Enjoy and share your quilt using the hashtags

#oldschoolfabric, #classmatesquilt, #rileyblakedesigns, and #iloverileyblake.

## QUILT LAYOUT DIAGRAM

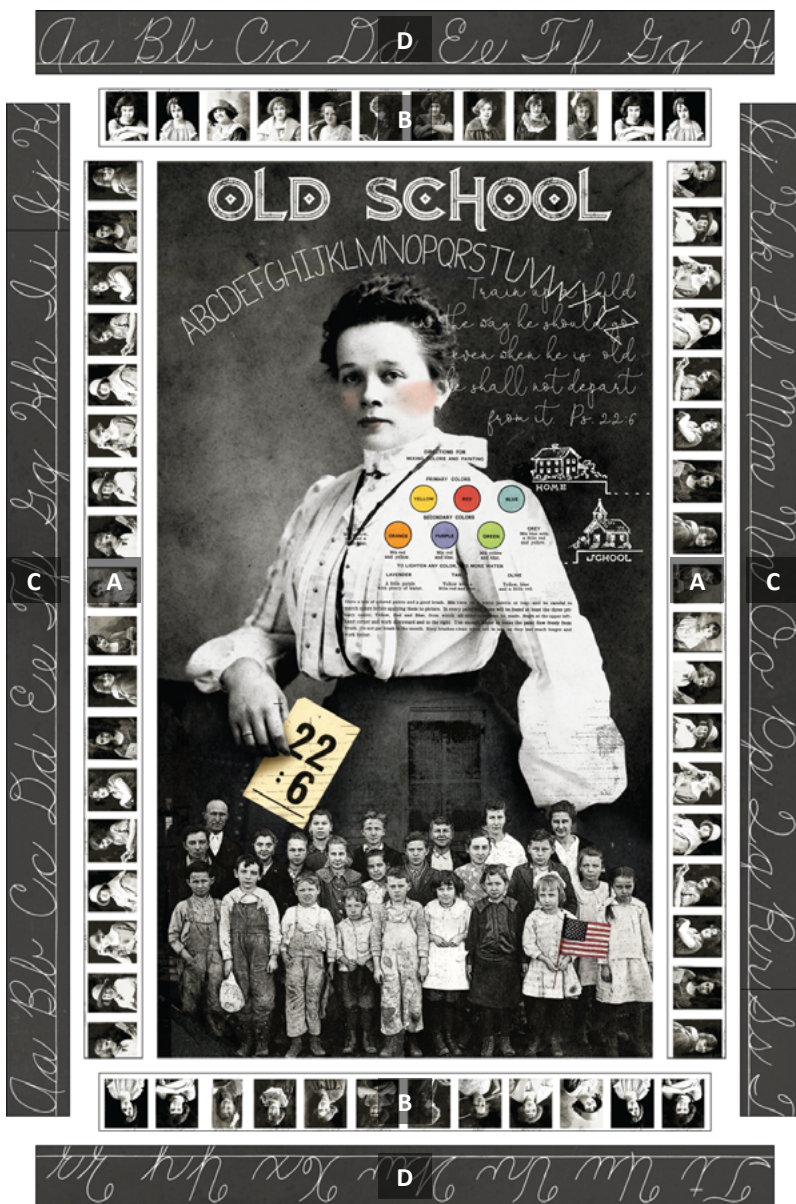

## CLASSMATES QUILT

