

FAST LANE



HOT WHEELS
CLASSIC

FAST LANE

FINISHED QUILT SIZE 63½" x 63½"

Measurements include ¼" seam allowance.

Sew with right sides together unless otherwise stated.

Please check our website www.rileyblakedesigns.com for any revisions before starting this project. This pattern requires a basic knowledge of quilting technique and terminology. The quilt and block diagrams portrayed are virtual images. The layout and look of your project may differ when using actual fabric.

FABRIC REQUIREMENTS

1 10-11480-42 Hot Wheels 10" Stacker

1 Yard Cast Iron Main (C11480 Cast Iron)

1⅞ Yards Blue Vintage Decals (C11482 Blue)*

1½ Yards Asphalt Shade (C200 Asphalt)

⅓ Yard Riley Mustard Solid (C120 Riley Mustard)

*includes Binding

CUTTING REQUIREMENTS

Please read instructions before cutting fabrics.

Refer to the quilt photo for fabric placement.

WOF- width of fabric.

Label pieces as they are cut.

Cast Iron Main

Cut 6 strips 5½" x WOF for outside border.

Blue Vintage Decals

Cut 7 strips 2½" x WOF for binding.

Cut 6 strips 2" x WOF for inside border.

Asphalt Shade

Cut 20 strips 1¾" x WOF.

Sub-cut from strips:

40 – 1¾" x 10" (A)

16 – 1¾" x 13" (B)

8 – 1¾" x 16" (C)

Cut 1 strip 1⅞" x WOF.

Sub-cut from strip:

1 – 1⅞" x 10" (D)

4 – 1" x 1⅞" (E)

1 – 1¾" x 21" (F)

Cut 1 strip 1⅞" x WOF (G).

Cut 1 strip 1½" x WOF

Sub-cut from strip:

1 – 1½" x 21" rectangle (H)

8 – 1" x 1½" rectangles (I).

Cut 2 strips 1¼" x WOF (J).

Riley Mustard Solid

Cut 3 strips 2" x WOF (K) .

Cut 2 strips 2" x WOF.

Sub-cut from strips:

2 – 2" x 21" (L)

1 – 2" x 10" (M)

10 – 1" x 2⅞" (N)

QUILT ASSEMBLY

Refer to the quilt photo for placement of the prints. Use a ¼" seam allowance. Press seam allowances towards the dark side. Label segments as they are cut. Seam allowances vary so measure through the center of the quilt before cutting border pieces. Sew side borders first.

Sew 1 K strip to the G strip and press. Sub-cut into (30) 1" segments. Label as segment O.



Sew 1 L rectangle to the H rectangle and press. Sub-cut into (8) 1" segments. Label as segment P.




Sew 1 K strip to 1 J strip and press. Repeat to make a second strip set. Sub-cut into (82) 1" segments. Label as segment Q.



Sew the M rectangle to the D rectangle and press. Sub-cut into (4) 1" segments. Label as segment R.



Sew one L rectangle to the F rectangle and press. Sub-cut into (10) 1" segments. Label as Segment S.



FAST LANE

To create the road center lines, sew the labeled segments and pieces end-to-end in the following order:

O-O-O-N (repeat for a total of 10 sets to be used in Blocks 1 and Blocks 3)

Label as segment T.



S-Q-Q-Q (repeat for a total of ten sets to be used in Blocks 2 and Blocks 4)

Label as segment U.



P-Q-Q-Q-Q-I (repeat for a total of eight sets to be used in Blocks 3)

Label as segment V.



R-Q-Q-Q-Q-Q-E (repeat for a total of four sets to be used in Blocks 4)


Label as segment W.



To create the road segments, sew an A rectangle to the top and bottom of each segment T.



Sew an A rectangle to the top and bottom of each segment U.

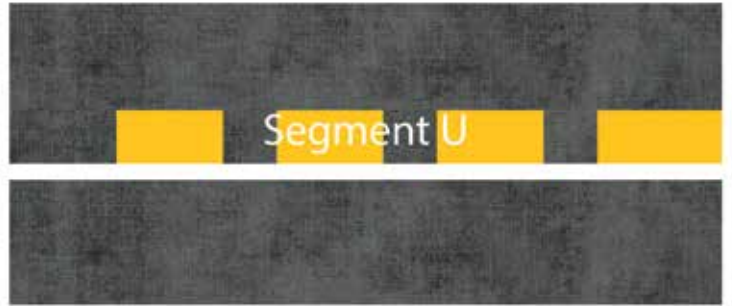

Sew a B rectangle to the top and bottom each segment V.




Sew a C rectangle to the top and bottom of each segment W.




Sew the road segments and 10" Stacker squares together according to the diagrams below.

BLOCK 1 (make two)

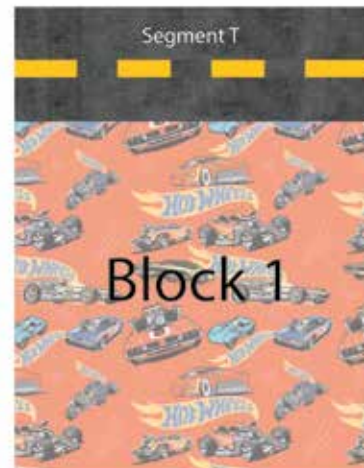


FAST LANE


BLOCK 2 (make two)

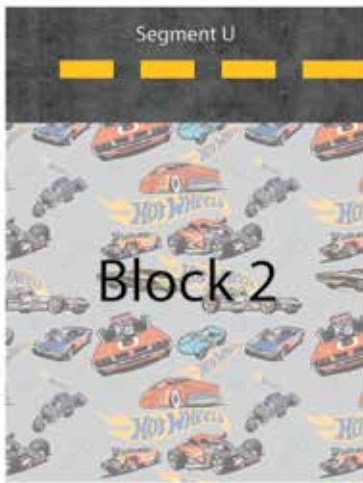


BLOCK 3 (make eight)

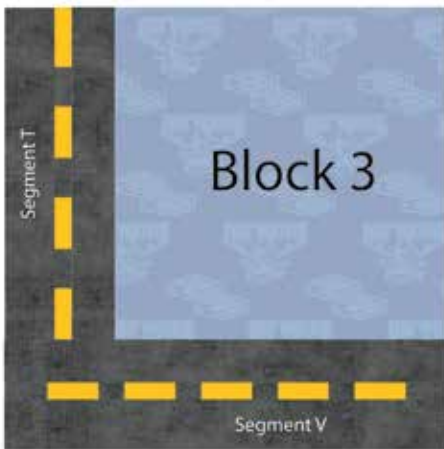

BLOCK 4 (make four)

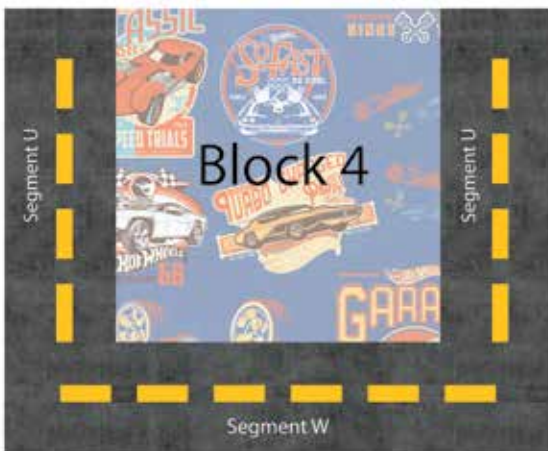

Sew four blocks together according to the layout below. Sew rows together to complete the Quilt Center. Quilt Center should measure 50½" x 50 ½".

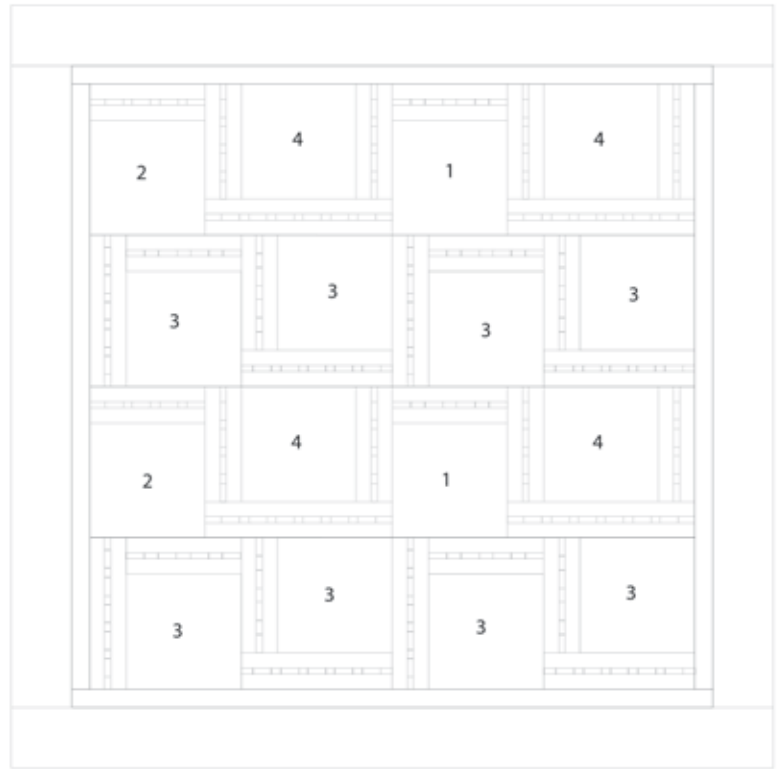

Inner Border

Side borders should be 50½". Top and bottom borders should be 53½".

Outer Border

Side borders should be 53½". Top and bottom borders should be 63½".

Finish quilt by layering the quilt top, batting and back. Quilt as desired. Bind with the blue vintage decals strips. Have fun with your colors and enjoy the journey of making your quilt.